

Platform turned upside down? No Problem.


IRIDIUM BASED SURFACE BEACON

The Rover is an independently powered, self-contained satellite transceiver designed to work in the most rugged ocean environments. Things don't always follow plan, so the Rover has two custom dual Iridium/GPS antennas so that in the event the surface expression is flipped over, the unit will continue to record its position and transmit it back to you. Packaged in a ruggedized, UV protected, marine grade housing the Rover makes use of the low power, real time Iridium satellite constellation and GPS to reliably transmit the buoy's position automatically or on demand at any time.

Key Features

- **Two antennas at the top and bottom allow the unit to collect and transmit data even if it is capsized**
- **Surface only**
- **Delrin enclosure with user replaceable batteries**
- **Over 8,000 messages (up to 2 years)**
- **Utilizes the new 9603 modem**
- **Can operate on the Xeos Online console**

The Rover is designed to meet or exceed your operational requirements for a surface beacon. All Xeos products are fully backed by a comprehensive warranty and excellent support. To arrange a demo or to learn more about our products please contact us at the numbers below.



Xeos *Technologies Inc* **Data Telemetry Specialists**

Xeos Technologies Inc. Tel: 902.444.7650
2 Bluewater Road Fax: 902.444.7651
Bedford, NS, Canada sales@xeostech.com
B4B 1G7 www.xeostech.com

ROVER




ROVER

TECHNICAL SPECIFICATIONS*

Xeos Online

Xeos Online is a web-hosted application that streamlines and facilitates the management of all your Iridium devices. A single source for device management, team setup, notification and alarm management, data collection, analysis, and billing, Xeos Online puts it all at your fingertips. Mobile ready and cross-browser compatible, be in control from anywhere.

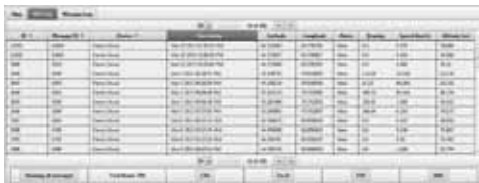

Who are we?

Xeos is a leading technology firm created by visionaries with a passion for excellence. Xeos prides itself on a pioneer mentality, always striving to create superior technological solutions to tracking and monitoring problems. For more information on our COTS and custom developments please contact us at the numbers below.

Xeos Technologies Inc.
2 Bluewater Road
Bedford, NS, Canada
B4B 1G7

Tel: 902.444.7650
Fax: 902.444.7651
sales@xeostech.com
www.xeostech.com

Functionality

Base Function:

2-way Iridium Communication

Serial Programmable Functions:

User ID, Repetition Period,
Transmit intervals, data message

Electrical

Supply Voltage:

18 AA Batteries (Lithium or Alkaline)

Operational Time:

8000 messages
(or every 3 hours for 2 years)

Sleep Current:

100uA

Transmit Current:

70mA

Communication

Iridium:

9603 Modem

Antenna:

Xeos Proprietary Passive Patch antennas

Mechanical

Dimensions:

214.12 mm L
63.5 mm Diameter
(8.43" L x 2.5" Diameter)

Weight:

875g - with lithium batteries
1055g - with alkaline batteries

Material:

All Polyoxymethylene (Delrin)

Environmental

Operating Temperature:

-40° C to +60° C



*Technical Specifications subject to change without notice.

Xeos Technologies Inc
Data Telemetry Specialists

ROVER rev1.2 Aug. 27th 2013

